

Navylam+ Installation Guide



As with any hardwood floor we recommend that before install, to randomize planks of parquet on the floor every 3 rows to harmonize colours from all packs of flooring and prepare your sections.


After that, draw a line on the floor to delimit the surface to glue. Take the planks and place them so you can glue in the correct order.

Begin the laying of your bathroom parquet flooring and do not forget to allow 5mm gap all around your expansion joint.

For the first line of planks, ensure the groove (T&G) is on the wall side and the tongue facing you. Now that the first line is laid, apply Navycol+ along the tongue not forgetting the end of the plank (blade). If any glue overflows on the wood flooring, clean it immediately. Continue to lay with the same process and once installed remove expansion chocks.

The next step is sealing the expansion joint. Before beginning, protect your parquet flooring using the adhesive tape all around your room, in peripheral. Now Run the Navyjoint in to the expansion gap and smooth it with a spatula. Remove excess adhesive and allow to dry.

Once install has been complete remove tape from perimeter and sweep/brush floor and apply an even coat of Navyoil using the cloths and allow to touch dry before walking and up to 8 hours before use as a bathroom floor.

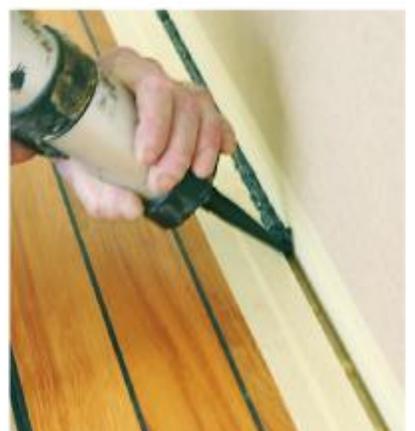

The packages must be opened when laying in order to stabilize according to the hygometry in the room which must be ranked between 45% and 65%. The humidity rate must be lower than 3% for a 2 cm depth in mortar or concrete support.

Use of any materials must be applied in relation to a level of humidity indicated on the technical application document.

In relation to fresh screed the humidity rate of the screed must not exceed 3%, it is necessary to use ISO ALU TB (incompatible with under floor heating).

Concerning a laying on under floor heating, the humidity rate of the support must be lower than 2% and lower than 0.5% for an anhydrite screed, under heating it must be turned on a few days before the laying (indicated in UTD 51.2).

The 10 year guarantee Navylam+ bathroom floor is validated that the floor was installed to the correct guidelines and the use of NAVYKIT and NAVYCOL during install:

- The install/laying must adhere to the instructions mentioned above.
- The exclusive use of Navycol PU or SP for the floor laying and Navycol+ for joint gluing.
- The wood flooring must be regularly maintained as indicated in our instructions.

JOINT, OIL, GLUES				
CODE	PRODUCT	PACKAGE	CONS.	
NAVYKIT	THE SET NAVYLAM+ contains : <ul style="list-style-type: none"> • 2 Navycol+ for the watertightness of joints • wood chocks • 1 L of Navyoil • 1 cartridge of Black Navyjoint • 1 adhesive tape • 1 cloth for cleaning. 		1	1 set for 5 sq.m (do not forget the Navycol PS to glue on the floor)
	COL0303500	NAVYCOL+ : Tube of glue	1	1 tube for 2,5 sq.m
COL0107110	PS Navycol polymer	6 kg	1,2 kg/sq.m	
COL01071120	PS Navycol polymer	18 kg	1,2 kg/sq.m	



MAINTENANCE:

To keep your bathroom parquet floor Navylam+, use the Navy-Oil and wipe excess water dry with a clean cloth/mop.



www.maplesandbirch.co.uk - 0845 293 9474

